

AA171108F-UG-220V


'Compact' Water Cooler With Flexi Bubbler, Grey

Specification

Basin manufactured from stainless steel with all exposed surfaces in a textured finish. Anti-microbial flexible bubbler with self-closing push button and non-squirt features. Stainless steel bubbler and vandal resistant options available on request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings.



Inlet Connection:	G $\frac{1}{2}$ B
Outlet Connection:	40mm Bsp Waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, Type 304 Stainless Steel
Force To Activate:	≤ 22N
Refrigerant:	R-134a
Power Requirement:	220VAC, 50hHZ Single Phase
Capacity:	30L/hr Drinking Water At 10°C (Incoming 27°C, Ambient 32°C)

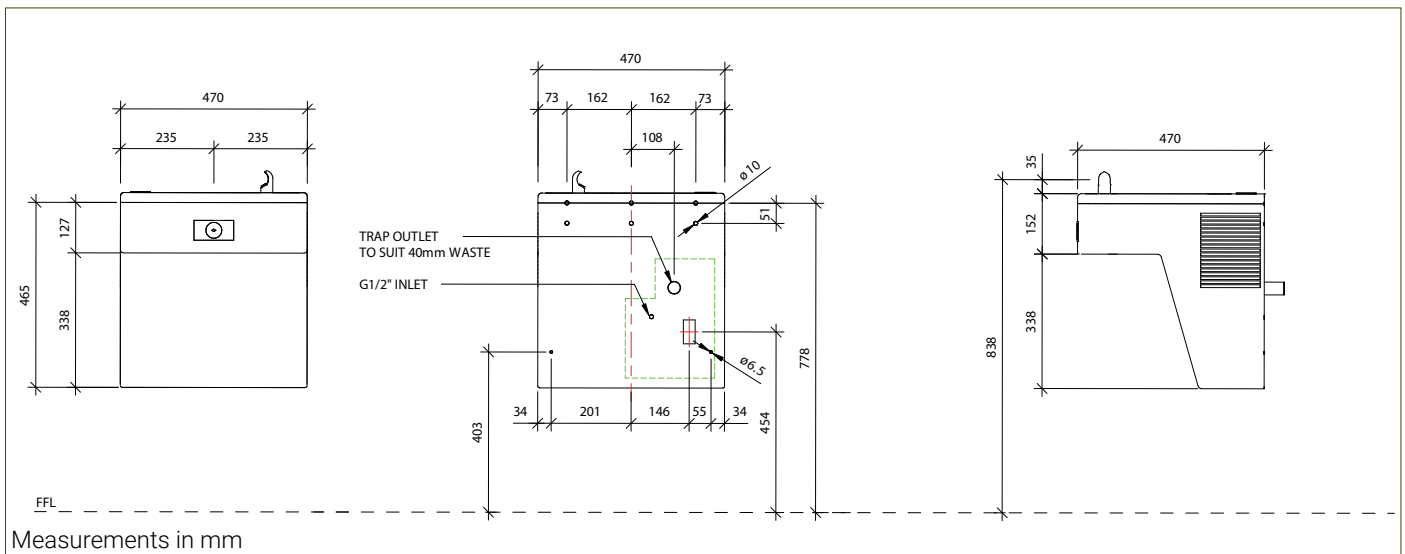

Resources

[Installation Guide](#) - [Warranty & Cleaning Guide](#) - [CAD Drawing](#)

As improvements in the design and performance of bubblers.com.au products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 06/23 © 2023 by Bubblers.com.au TD/ModelAA171108F-UG-220V/0623