



## ABF15

### H2O-to-Go!™ Bottle Filler, Push Button


#### Specification

Manufactured from #304 stainless steel with all exposed surfaces in satin finish and antibacterial impact resistant ABS surfaces. Self-closing push button activated valve with strainer. Perforated drain for hygiene & ease of cleaning. Unit is non-refrigerated.

<b>Inlet Connection:</b>	G½B
<b>Outlet Connection:</b>	40mm BSP Waste
<b>Water Pressure:</b>	200 – 500 kPa
<b>Water Temperature:</b>	4 - 30°C
<b>Flow Rate:</b>	3.8 LPM Laminar Flow
<b>Force To Activate:</b>	20N @300 kPa



Measurements in mm

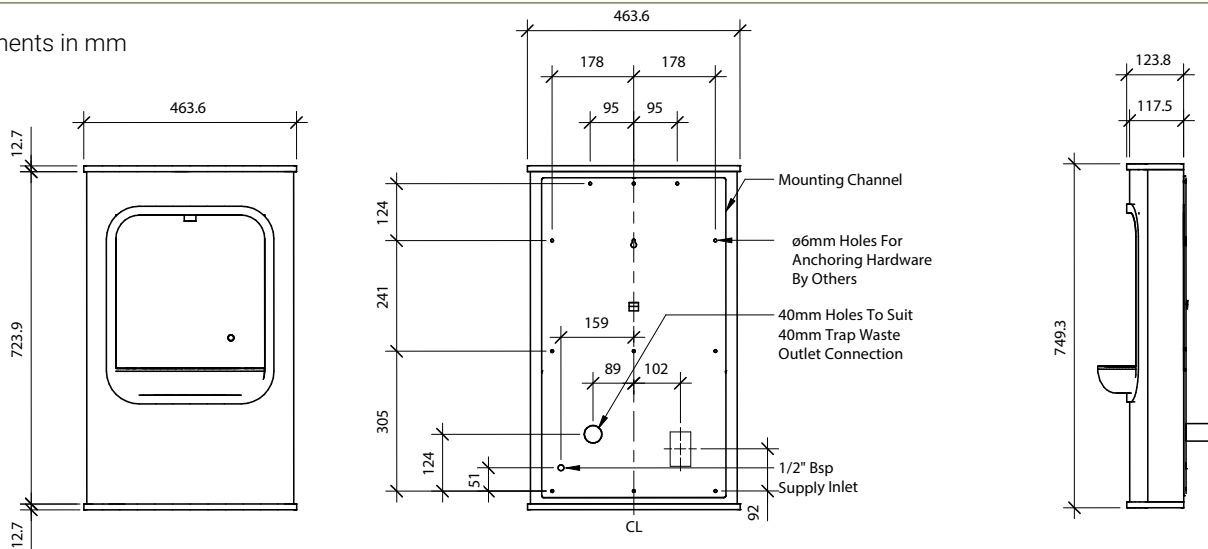

#### Resources

[Installation Guide](#) - [Warranty & Cleaning Guide](#) - [CAD Drawing](#)

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 08/23 © 2023 by Bubblers Australia TD/ModelABF15/0823