




OBFM5

Free Standing Outdoor Bottle Filler

Specification

Manufactured from stainless steel with a chrome plated self-closing push button. Valve includes stops and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Unit is non-refrigerated. Sensor operated unit is also available upon request.

Inlet Connection:	G½B
Outlet Connection:	Flex Tube
Water Pressure:	200 – 500 kPa
Force To Activate:	≤ 22N
Housing:	2.0mm, Type 304 Stainless Steel
Finish:	Enviro-Glaze® Fairway Green

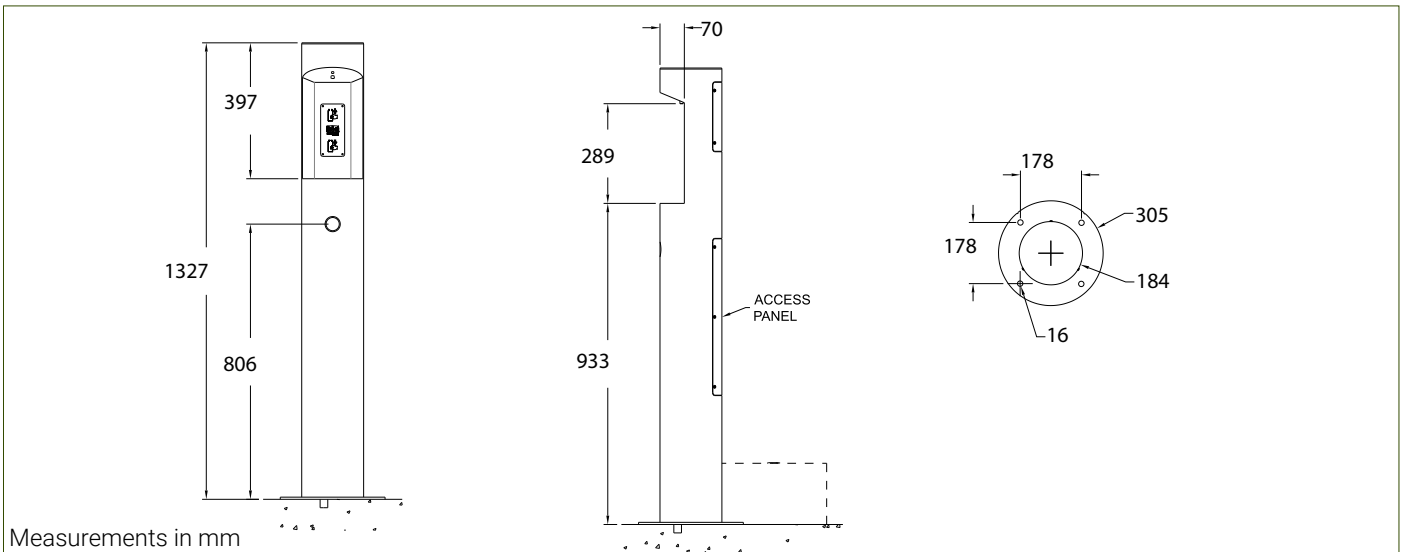

Resources

[Installation Guide](#) - [Warranty & Cleaning Guide](#) - [CAD Drawing](#)

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 08/23 © 2023 by Bubblers Australia TD/ModelOBFM5/0823