




## ABF15-CHILLED

H2O-to-Go!™ Refrigerated Bottle Filler,  
Push Button

### Specification

Manufactured from lead-free #304 stainless steel with all exposed surfaces in satin finish. Includes self-closing push button activated valve with strainer. Perforated drain for hygiene & ease of cleaning. Unit is refrigerated, containing our ABF15 H2O-to-Go!™ Bottle Filler, AA9100080-220V Remote Chiller and mounting assembly. Suitable for indoor installation only.

<b>Inlet Connection:</b>	1/2" BSP
<b>Outlet Connection:</b>	40mm BSP waste
<b>Water Pressure:</b>	200 – 500 kPa
<b>Water Temperature:</b>	4 - 30°C
<b>Flow Rate:</b>	3.8 LPM Laminar flow
<b>Power Requirement:</b>	220VAC, 50Hz, single phase (Chiller) 9V (Transformer incl., Bottle Filler)

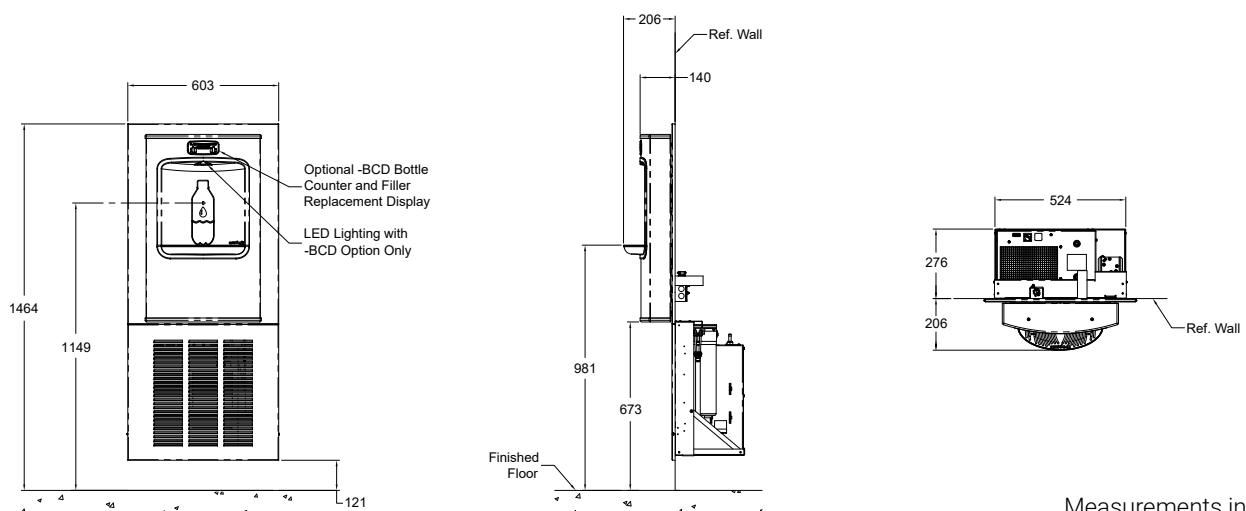

Measurements in mm

### Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 06/25 © 2025 by Bubblers Australia TD/ModelABF15-CHILLED/0625