



AA171408F-ABF12-IPL-220V

H₂O-To-Go! Bottle Filler & Water Cooler Combo
Sensor Op

Specification

Manufactured from #304 stainless steel with exposed surfaces in satin finish. Water-efficient anti-microbial flexi-bubbler with self-closing button. Push-button bottle filler and stainless steel bubbler options available upon request. Includes AA171408F-UG-220V and ABF12-IPL.

Inlet Connection:

1/2" BSP

Outlet Connection:

40mm BSP

Water Pressure:

200-500 kPa

Basin & Housing:


1.6mm, Type 304 Stainless Steel

Refrigerant:

R-134a

Power Requirement: 220VAC 50Hz, Single Phase

Capacity: 30L/hr Drinking Water At 10°C
(Incoming 27°C, Ambient 32°C)

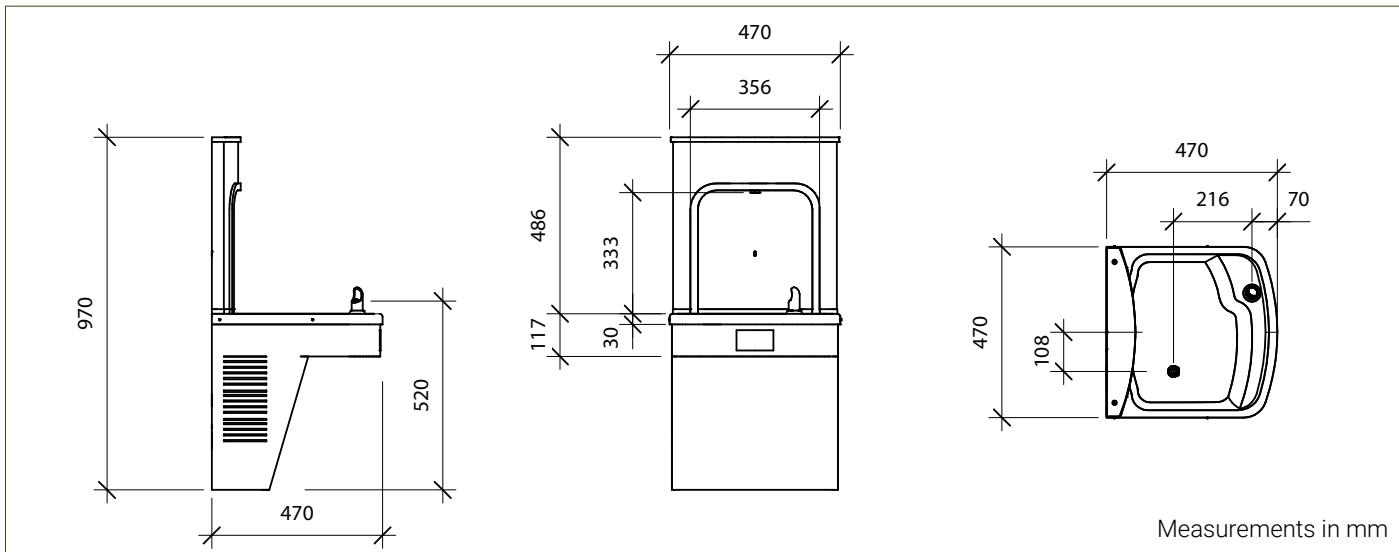

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 01/26 © 2026 by Bubblers Australia TD/ModelAA171408F-ABF12-IPL-220V/0126