




## ABF16-BCD-IPL-CHILLED

H2O-to-Go!™ Refrigerated Bottle Filler, Sensor & Counter Display

### Specification

Manufactured from lead-free #304 stainless steel with all exposed surfaces in satin finish. Sensor activated valve with strainer. Perforated drain for hygiene & ease of cleaning. Includes intuitive Bottle Counter Display to allow users to track the number of plastic bottles saved by choosing reusable containers. Unit is refrigerated, containing our ABF16-BCD-IPL H2O-to-Go!™ Bottle Filler, AA9100080-220V Remote Chiller and mounting assembly. Suitable for indoor installation only.

<b>Inlet Connection:</b>	1/2" BSP
<b>Outlet Connection:</b>	40mm BSP waste
<b>Water Pressure:</b>	200 – 500 kPa
<b>Supply Water Temp:</b>	4-30°C
<b>Flow Rate:</b>	3.8 LPM Laminar flow
<b>Power Requirement:</b>	220VAC, 50Hz, single phase (Chiller) 9V (Transformer incl., Bottle Filler)
<b>Capacity:</b>	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

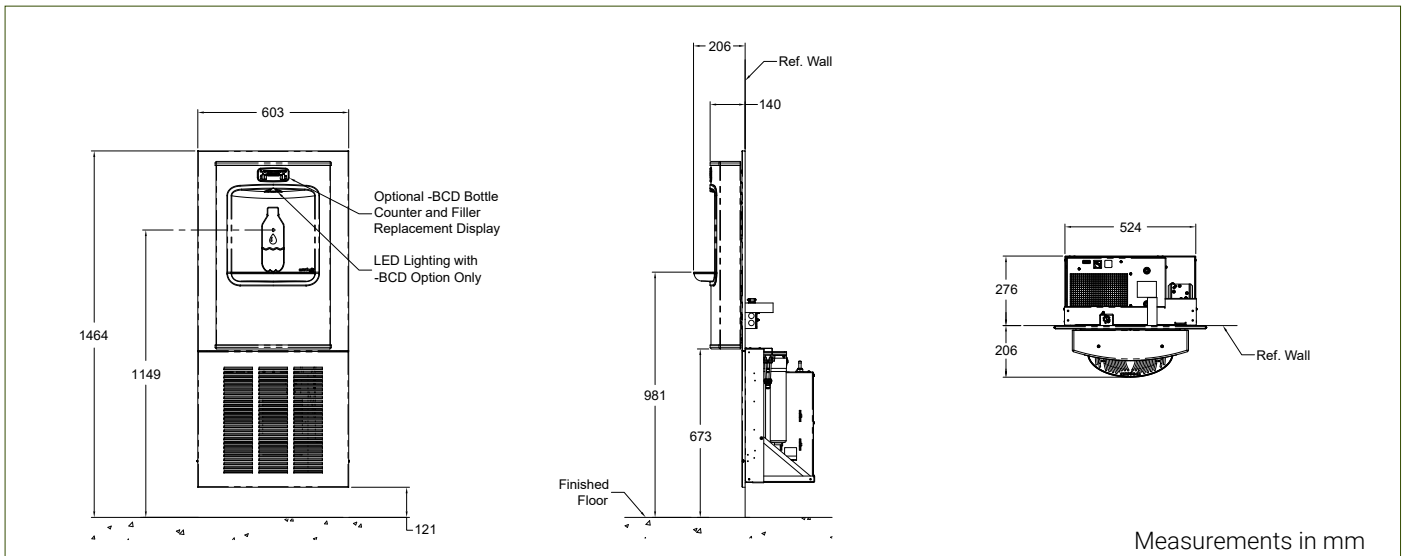

### Resources

[Installation Guide](#) - [Warranty & Cleaning Guide](#) - [CAD Drawing](#)

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/26 © 2026 by Bubblers Australia TD/ModelABF16-BCD-IPL-CHILLED/0326