

AA171408S-UG-VRB-220V




Wall-Mounted Water Cooler with Stainless Bubbler & VR Button, Satin Finish



Specification

Basin manufactured from stainless steel with all exposed surfaces in satin finish. Stainless steel bubbler with self-closing, vandal-resistant push button and non-squirt features. Flexible bubbler available upon request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Suitable for outdoor installation, see installation instructions for more details.

Inlet Connection:	1/2" BSP
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, Type 304 Stainless Steel
Force to activate:	≤ 22N
Refrigerant:	R-134a
Power Requirement:	220VAC, 50Hz, single phase
Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

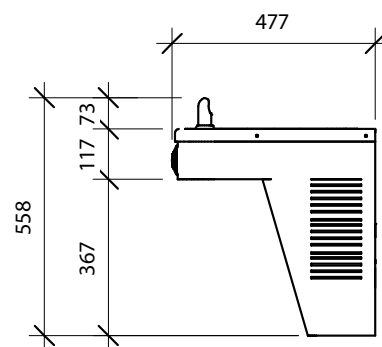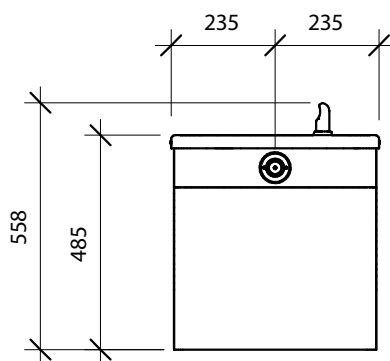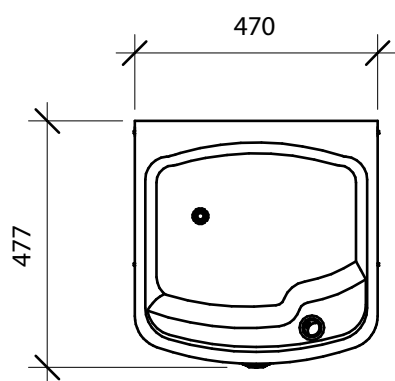

Measurements in mm

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/26 © 2026 by Bubblers Australia TD/ModelAA511105F-220V/0326