




AA9100080-220V

Remote Chiller

Specification

Remote electric refrigerated water chiller, designed for use with any drinking fountain and converts a drinking fountain into a water cooler. Installs directly under fountain or may be located in a service area. Can serve multiple outlets. Refer to installation instructions for positioning and electrical requirements.

Connections:	1/2" BSP
Water Pressure:	200 – 500 kPa
Housing:	Galvanised steel
Refrigerant:	R-134a
Power Requirement:	220VAC, 50Hz, single phase
Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

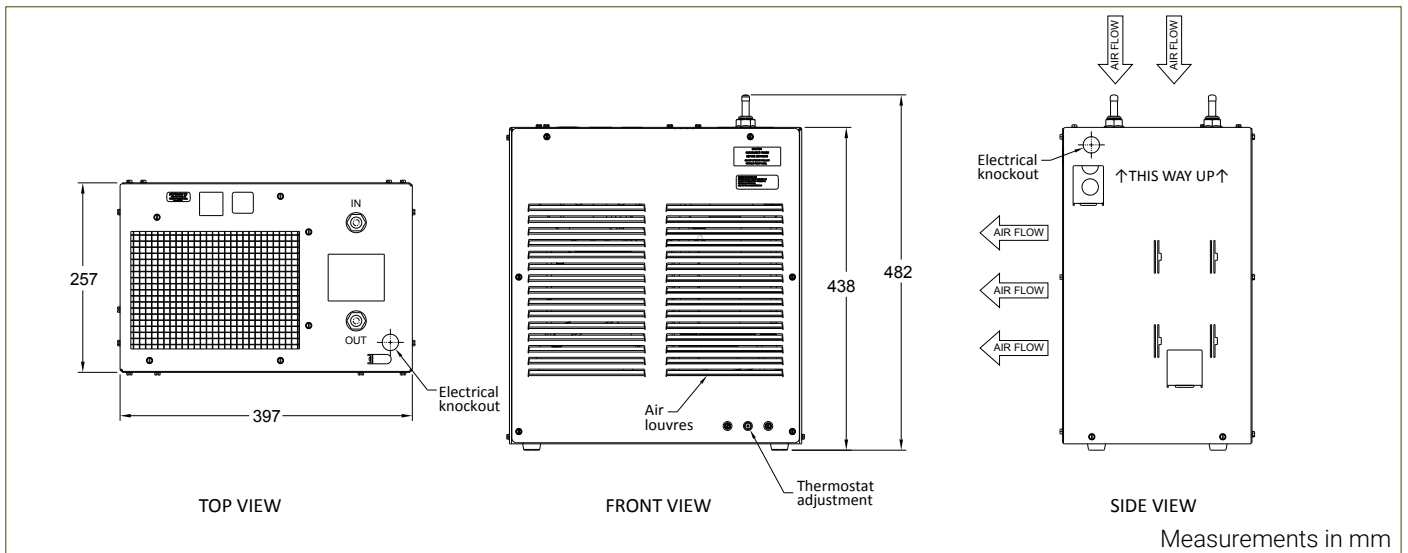

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 3/26 © 2026 by Bubblers Australia TD/ModelAA9100080/0326