





ABF12-BCD-IPL

H2O-to-Go!™ Bottle Filler Add-On, Sensor & Counter Display

Specification

Manufactured from #304 stainless steel with all exposed surfaces in satin finish and antibacterial impact resistant ABS surfaces. Sensor operated valve with strainer to ensure touch-free operation. Includes intuitive Bottle Counter Display to allow users to track the number of plastic bottles saved by choosing reusable containers. Suitable for all Bubblers wall mounted water coolers.

Inlet Connection:	1/4" Push Fit Connection
Water Pressure:	200 – 500 kPa
Flow Rate:	3.8 LPM
Actuation Type:	Sensor
Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

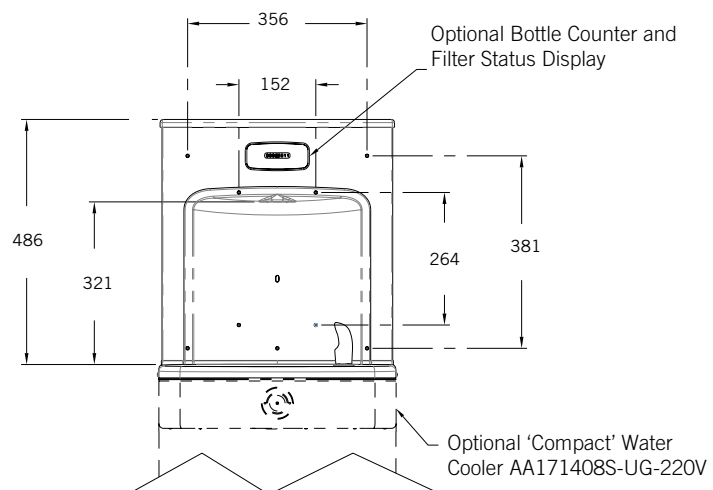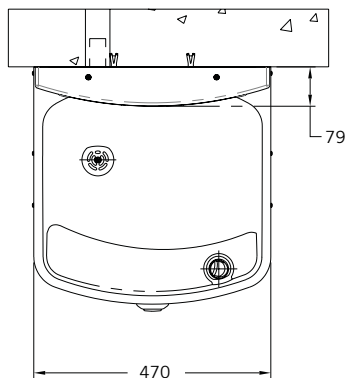

Measurements in mm

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 03/26 © 2026 by Bubblers Australia TD/ModelABF12-BCD-IPL/0326