

AA171408S-VRB-ABF11S-220V

SpringH2O® Water Cooler & Push Button Bottle Filler Combo

Specification


Manufactured from #304 stainless steel with exposed surfaces in satin finish. Water-efficient stainless steel, lead-free bubbler with self-closing, vandal resistant button and self-closing push button bottle filler. Suitable for outdoor installation, see installation instructions for more details.

Inlet Connection:	1/2" BSP
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin & Housing:	1.6mm, Type 304 stainless steel
Refrigerant:	R-134a
Power Requirement:	220VAC, 50Hz, single phase.
Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

Lead Free
WMTS105
Lic. 022317

LEAD-FREE WATER

NOTES:
A. 1/2" BSP SUPPLY INLET
B. WASTE OUTLET
C. ELECTRICAL SERVICE ROUGH IN
D. BOTTLE FILLER SENSOR (SHOWN)
E. FOUNTAIN PUSHBUTTON CARTRIDGE

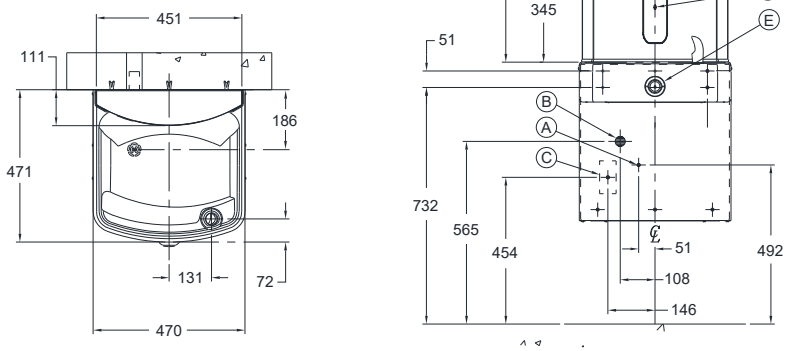

Measurements in mm

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 09/26 © 2026 by Bubblers Australia TD/Model AAA171408S-VRB-ABF11S-220V/0926