




ABF12S-BCD-IPL

SpringH2O® Sensor & Bottle Counter Display Bottle Filler Add-On

Specification

Manufactured from lead-free #304 stainless steel with all exposed surfaces in satin finish. Sensor operated valve with strainer to ensure touch-free operation. Easy to read digital bottle counter display (BCD) also available to highlight water savings. Suitable to be mounted on all Bubblers -UG series water coolers to dispense chilled water. Suitable for outdoor installation, see installation instructions for more details.

Inlet Connection:	1/4" Push Fit Connection
Water Pressure:	200 – 500 kPa
Water Capacity:	30L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)
Water Temperature:	4 - 30°C
Flow Rate:	3.8 LPM Laminar flow
Actuation Type:	Sensor

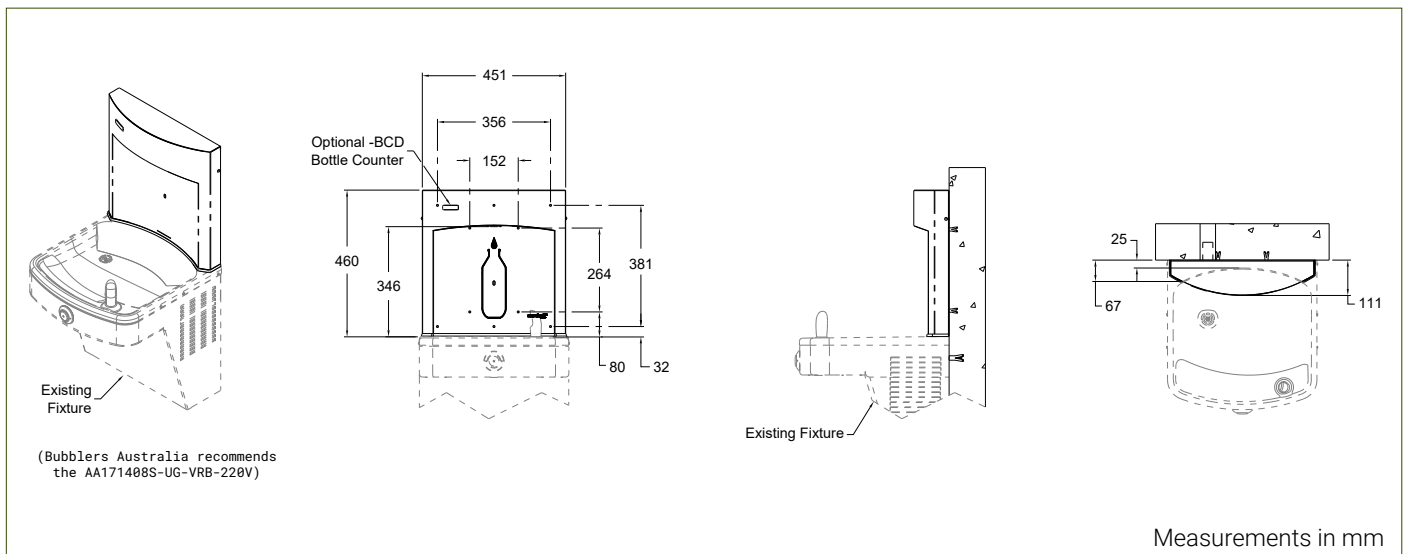

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice. The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 09/26 © 2026 by Bubblers Australia TD/ModelABF12S-BCD-IPL/0926