



AA511105F-220V


Classic Freestanding Water Cooler, Granite



Specification

Freestanding wall faced water cooler with granite powder coated finish. Anti-microbial flexible bubbler with self-closing push button and non-squirt features. Stainless steel bubbler options available on request. Valve includes flow adjuster and strainer. Integral perforated drain for hygiene & ease of cleaning. Smooth radiused design eliminates sharp corners. Fully concealed pipework and fixings. Adjustable thermostat with an off position regulates the refrigeration system.

Inlet Connection:	1/2" BSP
Outlet Connection:	40mm BSP waste
Water Pressure:	200 – 500 kPa
Basin:	1.6mm, Type 304 stainless steel
Housing:	Granite powder coated galvanised steel
Refrigerant:	R-134a
Power Requirement:	20VAC, 50Hz, single phase
Capacity:	19L/hr drinking water at 10°C (incoming 27°C, ambient 32°C)

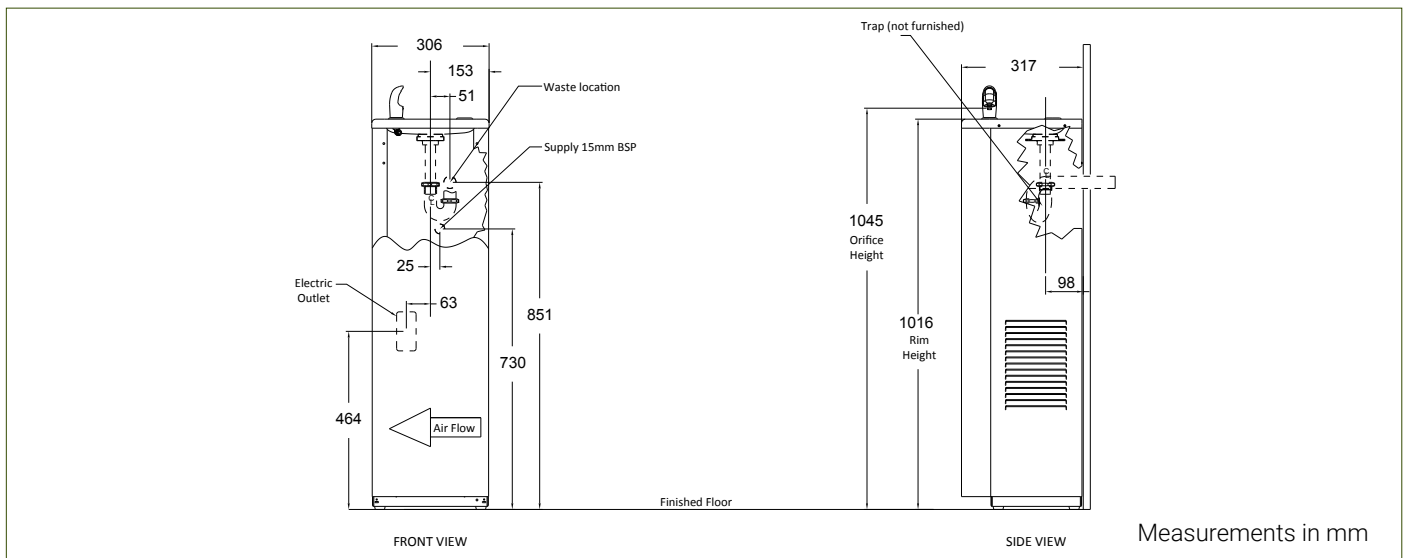

Resources

Installation Guide - Warranty & Cleaning Guide - CAD Drawing

As improvements in the design and performance of Bubblers Australia products are continuous, specifications may be subject to change without notice.

The illustrations and descriptions herein are applicable to production as of the date of this Technical Data Sheet. Revised 06/25 © 2025 by Bubblers Australia TD/ModelAA511105F-220V/0625